

AN EFFICIENT APPROACH TOWARDS TIDAL POWER PRODUCTION USING VERTICAL PLANAR MOTION

¹ Rani Uma Maheswari.R, ² Dhanalakshmi.S, ³ Sabaresh.R

¹ M.E- Communication Systems, Idhaya Engineering College for Women, Chinnasalem, Villupuram D.T, umaraju300692@gmail.com

² AP- Department Of Electronics and Communication Engineering, Idhaya Engineering College for Women, Chinnasalem, Villupuram D.T, lakshmiraj821@yahoo.co.in

³ B.Tech- Information Technology, Jeppiar Engineering College, Chennai. sabareshraju81294@gmail.com

Abstract

In power production, the tidal energy plays a vital role. This paper deals with the new initiative method to produce energy with latest innovation and cheaper cost. The waves with high force, hits the piston which then pushes the vertical plate. The plate is connected with the dynamo with the help of the shaft to make the motion easy. As the force of the waves gets increased, the dynamo gets rotated and so the power is generated.

The power generated from the dynamo is the dc power and this is been stored in the battery. The stored power is then converted as the ac power using the inverter with the help of the transistor 2N3055 which itself also acts as a power booster in order to boost up the power that is generated. As the dc power is converted to the ac power this can be used to run a load.

Keywords: Vertical plate, Dynamo, Transistor 2N3055, Inverter.

1. Introduction

Tidal power, also called tidal energy, is a form of hydropower that converts the energy obtained from tides into useful forms of power, mainly electricity. Although not yet widely used but tidal power has potential for future electricity generation. Tides are more predictable than wind energy and solar power. It is very useful for the coastal states as almost complete south India and partial western part of India is surrounded by sea border. Due to out-dated system, the biggest operating tidal station in the world, La Rance in France, generates 240MW of power but in India it is very less than 50MW.

Among sources of renewable energy, tidal power has traditionally suffered from relatively high cost and limited availability of sites with sufficiently high tidal ranges or flow velocities, thus constricting its total availability. The tidal power is taken from the earth's oceanic tides. Tidal forces are periodic variations in gravitational attraction exerted by celestial bodies. These forces create corresponding motions or currents in the world's oceans.

2. EXISTING SYSTEM

There are many ways of generating electricity from the tides. One among them is the use of turbines in the oceans. Tidal turbines are very much like underwater windmills except the rotors are driven by consistent, fast-moving currents. The submerged rotors harness the power of the marine currents to drive the generators, which in turn produce electricity.

Water is 832 times denser than air and consequently tidal turbine rotors can be much smaller than wind turbine rotors thus they can be deployed much closer together and still generate equal amount of electricity. During operation, the force of the tidal flow in Strangford Lough is equivalent to a 345 mph wind generating 100 tonnes of thrust on the rotors.



Figure: 1 Existing system of tidal power generation using turbines

2.1 DRAWBACKS OF USING TIDAL TURBINES

Turbines are not capable of using the full strength of the waves for producing electricity. It produces energy with a very high transmission loss as the boosters used are not that efficient. Moreover the construction cost is high and it also requires special maintenance to monitor whether the blades of the turbines are rusted. The mounting of turbines interrupts the habitat of marine life greatly.

3. OVERVIEW OF THE PROPOSED SYSTEM

The proposed approach deals with new initiative to produce energy from tides with latest innovation and cheaper cost. Here the vertical plates are used to create the motion in the shaft which gets transferred to the dynamo. The power produced from the dynamo is boosted by the power booster and it is fed to the battery.

The battery power is then converted to the main current using the inverters made from power transistors 2N3055. This converted power is used for running the loads like glowing the bulb or tube light, charging the laptops or mobile phones, running the table or pedestal fan etc.,

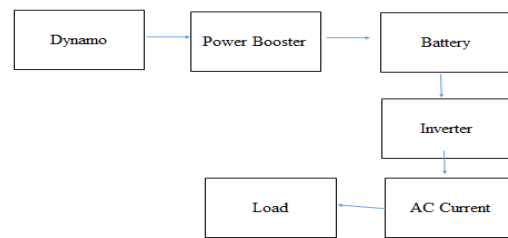


Figure: 2 Block diagram of the overall proposed system

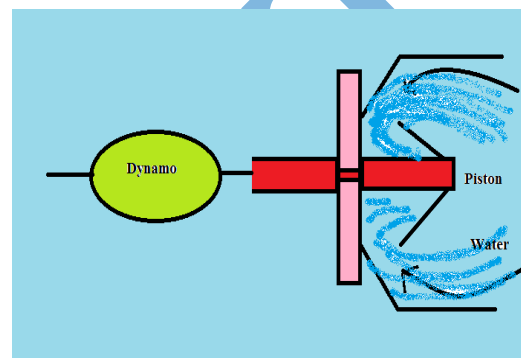


Figure: 3 Process of the overall proposed system

4. IMPLEMENTATION

4.1 BOOSTING AND CONVERSION OF POWER

The process in the implementation is assuming that the power generated from the dynamo is stored in the battery. The stored power is connected with the inverter and the power booster which converts the DC power to the AC power. The boosting and inverting of the power, both are done with the help of the transistor 2N3055 itself. So the power is converted to AC power.

The power gets boosted and the input power 12V gets increased as 190V which is nearly equal to 230V 50Hz. This power is capable of running the load by feeding the power to the power grid.

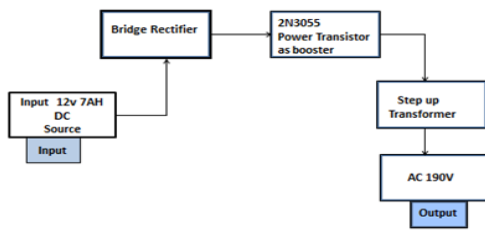


Figure: 4 Block diagram of boosting and conversion of power

5. RELATED WORKS

5.1 INVERTER

The inverter circuit consisting of the different components with their specification is given in the circuit diagram and the components are been explained below.

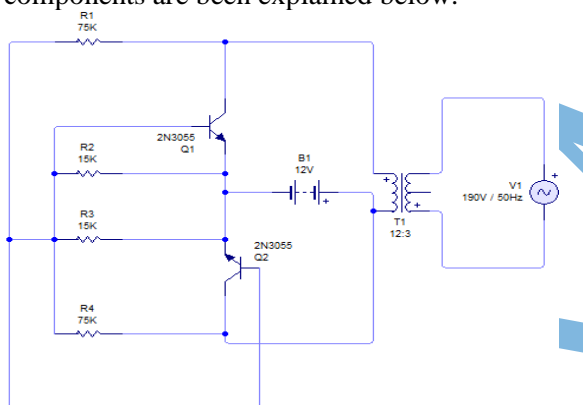


Figure: 5 Circuit diagram of the inverter

5.2 FEATURES OF THE BATTERY AND ITS SPECIFICATION

The battery is assumed to be the input source in the implementation. The power stored in the battery is assumed as the power generated from the dynamo rotation with the to-and-fro motion of the tidal waves. The input power from the battery is 12V and 7 AH DC source which is the capacity of the battery that is been used for the implementation. The model number of the battery used is **EXIDE CS 7-12**. This power from the battery is fed to the bridge rectifier.

5.3 BRIDGE RECTIFIER

The power from the battery is fed to the bridge rectifier. The bridge rectifier is used in the setup in order to manage the polarity problems. The entire setup will not be damaged and will have the same output even if the wires in the battery are connected wrongly to the positive and negative terminals.

The other use of this bridge rectifier is to prevent the damage of the transistor by passing the current in the reverse direction. The power is then transferred to the power transistor 2N3055.

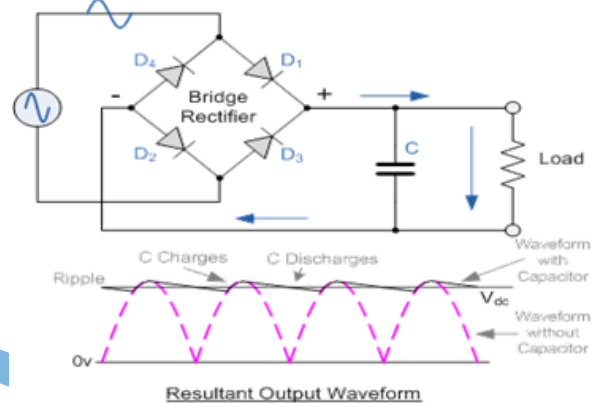


Figure: 6 Circuit diagram and output waveform of bridge rectifier

5.4 POWER TRANSISTOR 2N3055

This power transistor used in the setup is 2N3055. This transistor helps in both inverting the power from DC to AC as well as in boosting the power. This transistor has the capacity of boosting the power which is been checked out practically. The power transistor is used in the setup in order to with stand the high current passage and to avoid damage of the circuit due to high passage of current.

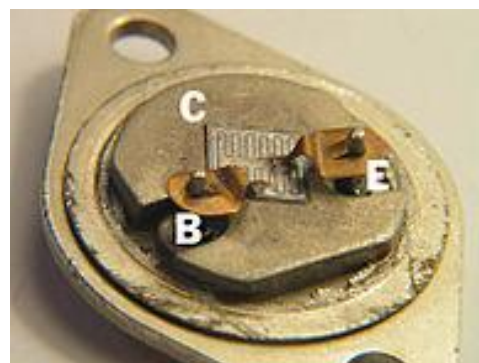


Figure: 7 Internal parts of transistor 2N3055

5.5 POWER TRANSFORMER

Transformer plays a most important role in this setup. The input 12V from the battery is fed to the power transformer which also plays the role of boosting the power. The 12V power is boosted and given at the output as 190V which is nearly equal to 230V that is capable of running the load.

The transformer used here is the step-up transformer which is normally used to increase the voltage and the current is decreased at the output.

6. RESULT AND OUTPUT DISCUSSION

As a result the given 12V DC source is converted to the AC source and the power is boosted to 190V which is capable of running the load like glowing the bulb, running the table fan, charging the laptops or mobile phones. The input taken in the battery is the assumption that the power generated from the rotation of the dynamo due to tidal waves is stored in the battery.

7. HARDWARE MODULE



Figure: 8 Output Representation

8. CONCLUSION

As discussed in the above sections if the whole concept is implemented throughout the country, it creates a boom in power production sector by producing at least 65% of total energy required nationwide.

REFERENCES

- 1) Ocean Energy Council (2011). "Tidal Energy: Pros for Wave and Tidal Power"
- 2) Douglas, C. A.; Harrison, G. P.; Chick, J. P. (2008). "Life cycle assessment of the Seagen marine current turbine". *Proceedings of the Institution of Mechanical Engineers, Part M: Journal of Engineering for the Maritime Environment*. **222** (1): 1–12. doi:10.1243/14750902JEME94
- 3) Lewis, M.; Neill, S.P.; Robins, P.E.; Hashemi, M.R. "Resource assessment for future generations of tidal-stream energy arrays". *Energy*. **83**: 403–415. doi:10.1016/j.energy.2015.02.038
- 4) S. E. Ben Elghali, "Marine Tidal Current Electric Power Generation Technology: State of the Art and Current Status" 2007 IEEE International Electric Machines & Drives Conference, vol-2.